

MV-SC3030XC

3 MP Color Vision Sensor



Introduction

With built-in high-precision vision algorithms, MV-SC3030XC vision sensor can realize counting, existence, measurement, recognition and other functions. It can be easily configured and operated via the SCMVS client software, and it uses RS-232 and Ethernet to output vision tool results and customized results.

Applicable Industry

Consumer electronics, food and pharmaceutical, automobile, etc.

Available Models

- 8 mm focal length: MV-SC3030XC-08M-WBN
- 12 mm focal length: MV-SC3030XC-12M-WBN
- 16 mm focal length: MV-SC3030XC-16M-WBN

Key Features

- Adopts embedded hardware platform to realize high-speed image processing.
- Built-in high-precision positioning, measurement and recognition algorithms for counting, defects, existence, positioning and other functions.
- Supports RS-232, TCP, UDP, FTP, Modbus, PROFINET, EtherNet/IP and other communication modes.
- Adopts multiple IO interfaces for input and output signals.
- Supports viewing the device's status in real time via 360° visual indicator, convenient for debugging and maintenance.
- Rotatable cable tail design, suitable for narrow space.
- Adopts polarized, diffuser, and full-transparent multiple optical lighting with good environmental adaptability.
- IP67 protection without fear of harsh industrial application environments.

Model	MV-SC3030XC-08M-WBN	MV-SC3030XC-12M-WBN	MV-SC3030XC-16M-WBN
Tool			
Vision tool	<ul style="list-style-type: none">● Measurement: P2P measurement, P2L measurement, contrast measurement, grayscale size, edge width measurement, width measurement, brightness analysis, L2L angle, color measurement, color size, diameter measurement, and line angle● Existence: Spot existence, edge existence, contour existence, pattern existence, circle existence, line existence, anomaly judge, and existence detection● Count: Spot count, edge count, contour count, pattern count, learning-based count, and color count● Recognition: Multi-object count, code recognition, color contrast, color recognition, category recognition, classification registration, object detection registration, and OCR● Logic: Calculator, If module, logic judge, format output, condition judge, character comparison, and combination judge● Location: Calibration convert, single point alignment, point rectify, point grasp, scale transformation, and fixture● Deep learning: DL classification and DL object detection● Defect detection: Anomaly detection		
Solution capacity	Supports importing and exporting project, up to 32 projects can be stored		
Communication protocol	RS-232, TCP, UDP, FTP, PROFINET, Modbus, EtherNet/IP, MELSEC/SLMP, FINS, Keyence KV		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.45 μm × 3.45 μm		
Sensor size	1/1.8"		
Resolution	2048 × 1536		
Max. frame rate	40 fps		
Dynamic range	77.8 dB		
SNR	43 dB		
Gain	0 dB to 15 dB		
Exposure time	6 μs to 1 sec		
Pixel format	RGB 8, Mono 8		
Mono/color	Color		
Electrical feature			
Data interface	Fast Ethernet (100 Mbit/s)		
Digital I/O	12-pin M12 connector provides power and I/O, including opto-isolated input (LINE 0/1/2) × 3, opto-isolated output (LINE 3/4/5) × 3, and RS-232 × 1 Supports triggering device via pressing top trigger button		
Power supply	24 VDC		
Power consumption	Approx. 6.5 W @ 24 VDC		
Mechanical			
Lens mount	M12-mount, mechanical autofocus supported		
Focal length	8 mm	12 mm	16 mm
Lens cap	Polarized + diffuser + full-transparent lens cap		
Light source	White spot light source. Red/blue/IR point light source is optional		
Aiming system	1 LED		
Indicator	360° visual indicator		
Dimension	Straight angle: 80.1 mm × 43 mm × 44.3 mm (3.2" × 1.7" × 1.7") Right angle: 58.5 mm × 43 mm × 65.4 mm (2.3" × 1.7" × 2.6")		
Weight	Approx. 190 g (0.4 lb.)		

Specification


Model	MV-SC3030XC-08M-WBN	MV-SC3030XC-12M-WBN	MV-SC3030XC-16M-WBN
Ingress protection	IP67 (under proper installation of waterproof lens cap)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: −30 °C to 70 °C (−22 °F to 158 °F)		
Humidity	20% RH to 95% RH (no condensation)		
General			
Client software	SCMVS		
Certification	CE, KC		

Detection Range


Lens focal length	Installation distance	Field of View	Single Pixel Accuracy
8 mm	25 mm	22.08 mm × 16.56 mm	0.011 mm
	2000 mm	1766.40 mm × 1324.80 mm	0.863 mm
12 mm	60 mm	35.33 mm × 26.50 mm	0.017 mm
	2000 mm	1177.60 mm × 883.20 mm	0.575 mm
16 mm	100 mm	44.16 mm × 33.12 mm	0.022 mm
	2000 mm	883.20 mm × 662.40 mm	0.431 mm



Vertical FoV / mm

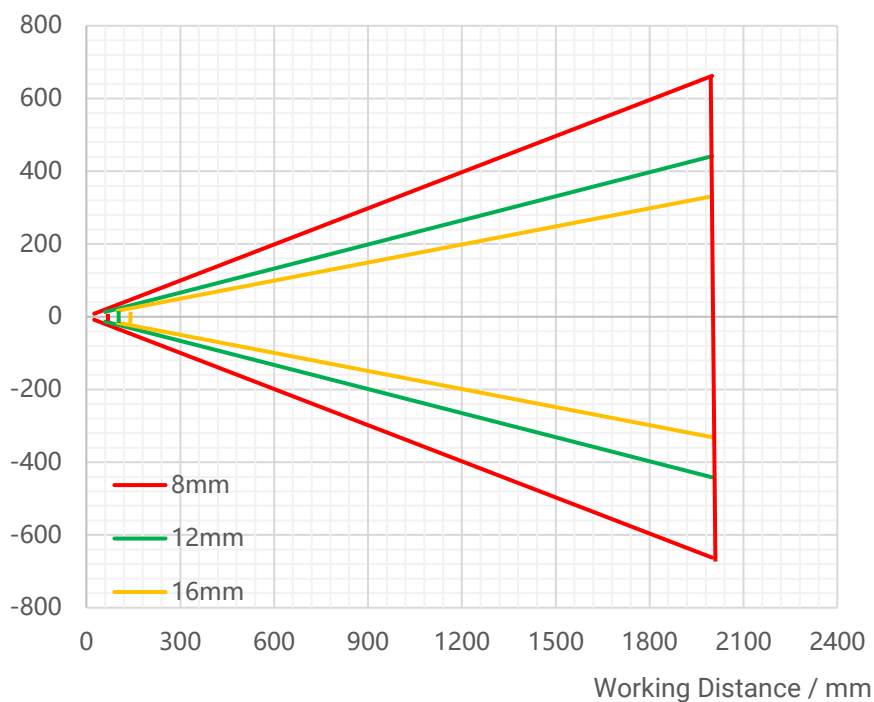

Device (Right Angle):

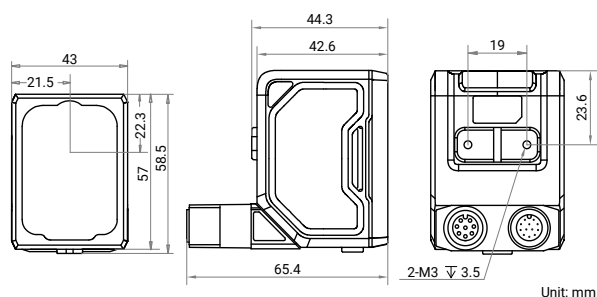[illegible][illegible]

Technical drawing of a 102x50x42mm bracket. The drawing includes three views: front, side, and end view.

Front View: The bracket has a total width of 102mm and a height of 50mm. It features a 6-hole pattern (3 rows of 2 holes) with a hole diameter of Ø5.5mm. The holes are spaced 19.7mm apart horizontally and vertically. There are two curved slots on the front face, each 19.7mm wide and 13.8mm high. The distance between the center of the first and second hole in the first row is 45mm.

Side View: The bracket has a height of 42mm.

End View: The bracket has a width of 19mm and features two Ø3.5mm holes spaced 19mm apart.

Unit: mm